

3.4	DIP switch configuration (SW1).....	41
3.4.1	CAN ID (Node-ID).....	41
3.4.2	CAN automatic bit rate detection.....	43
3.4.3	CAN bus termination.....	43
3.5	Status indicators.....	44
4	WIRING	45
4.1	Possible combinations to connect a motor.....	45
4.2	Main wiring diagram.....	47
4.3	Excerpts.....	48
4.3.1	Power supply.....	48
4.3.2	Logic supply.....	48
4.3.3	DC motor.....	48
4.3.4	EC (BLDC) motor.....	49
4.3.5	Sensor 1 Hall sensor.....	49
4.3.6	Sensor 2 Encoder / I/Os.....	49
4.3.7	Digital I/Os.....	51
4.3.8	Analog I/Os.....	51
4.3.9	CAN.....	51
4.3.10	USB.....	52
4.3.11	Motor temperature sensor (future release).....	52
	LIST OF FIGURES	53
	LIST OF TABLES	55
	INDEX	57

1.1.3 How to use

Follow these notations and codes throughout the document.

Notation	Meaning
ESCON2	stands for «ESCON2 Servo Controller»
«Abcd»	indicating a title or a name (such as of document, product, mode, etc.)
(n)	refers to an item (such as a part number, list items, etc.)
*	refers to an internal value
→	denotes “check”, “see”, “see also”, “take note of” or “go to”

Table 1-1 Notations used in this document

1.1.4 Symbols & signs

This document uses the following symbols and signs:









Type	Symbol	Meaning
Safety alert DANGER		Indicates an imminent hazardous situation . If not avoided, it will result in death or serious injury .
WARNING		Indicates a potential hazardous situation . If not avoided, it can result in death or serious injury .
CAUTION		Indicates a probable hazardous situation or calls the attention to unsafe practices. If not avoided, it may result in injury .
Prohibited action	 (typical)	Indicates a dangerous action. Hence, you must not!
Mandatory action	 (typical)	Indicates a mandatory action. Hence, you must!
Requirement, Note, Remark		Indicates an activity you must perform prior to continuing, or gives information on a particular point that must be observed.
Best practice		Indicates an advice or recommendation on the easiest and best way to further proceed.
Material Damage		Indicates information particular to possible damage of the equipment.

Table 1-2 Symbols and signs

2 SPECIFICATIONS

2.1 Technical data

ESCON2 Compact 60/30 (P/N 783734)		
Electrical data	Nominal power supply voltage V_{CC}	10...60 VDC
	Nominal logic supply voltage V_C	10...60 VDC
	Absolute supply voltage V_{min} / V_{max}	8 VDC / 62 VDC
	Output voltage (max.)	$0.95 \times V_{CC}$
	Output current $I_{cont} / I_{max} (< 4 \text{ s})$	30 A / 60 A
	Pulse Width Modulation (PWM) frequency	50 kHz
	Sampling rate PI current controller	50 kHz
	Sampling rate PI speed controller	10 kHz
	Sampling rate analog input	50 kHz
	Max. efficiency	98.5 % → Figure 2-4
	Max. speed DC motor	limited by max. permissible motor speed and max. output voltage (controller)
	Max. speed EC motor (FOC)	120'000 rpm (1 pole pair)
	Built-in motor choke per phase	470 nH / 30 A
Inputs & outputs	Sensor 1 Digital Hall sensor H1, H2, H3	0...24 VDC (internal pull-up)
	Sensor 2 (choice between multiple functions): • Digital incremental encoder • SSI absolute encoder [a] • BISS C unidirectional absolute encoder [a] • High-speed digital inputs 1...2 • High-speed digital inputs 3...4 • High-speed digital output 1	2-channel, EIA/RS422, max. 6.67 MHz 0.1...2 MHz (single-ended, configurable) 0.1...4 MHz (single-ended, configurable) EIA/RS422, max. 6.67 MHz Logic: 0...12 VDC, max. 6.25 MHz 3.3 VDC / $I_L \leq 24 \text{ mA}$ / $R_i = 75 \Omega$
	Digital Inputs 1...4	Logic: 0...25 VDC, inputs 1...2 PWM capable
	Digital Outputs 1...2	max. 30 VDC / $I_L \leq 500 \text{ mA}$ (open drain with internal pull-up)
	Analog Inputs 1...2	Resolution 12-bit, $\pm 10 \text{ VDC}$ (differential), 10 kHz
	Analog Outputs 1...2	Resolution 12-bit, $\pm 4 \text{ VDC}$ (referenced to GND), 25 kHz
	Motor temperature sensor [a]	Resolution 12-bit, 0...3.3 VDC (internal pull-up)
	Voltage outputs	Sensor supply voltage V_{Sensor}
Peripheral supply voltage $V_{Peripheral}$		-
Motor connections	DC motor	+ Motor, - Motor
	EC motor	Motor winding 1, Motor winding 2, Motor winding 3

Continued on next page.

3 SETUP

IMPORTANT NOTICE: PREREQUISITES FOR PERMISSION TO COMMENCE INSTALLATION

The **ESCON2 Compact** is considered as partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g) and **are intended to be incorporated into or assembled with other machinery or other partly completed machinery or equipment.**



WARNING

Risk of injury

Operating the device without the full compliance of the surrounding system with the EU Directive 2006/42/EC may cause serious injuries!

- Do not operate the device, unless you have made completely sure that the other machinery fully complies with the EU directive's requirements!
- Do not operate the device, unless the other machinery fulfills all relevant health and safety aspects!
- Do not operate the device, unless all respective interfaces have been established and fulfill the requirements stated in this document!



CAUTION

Burn hazard

Hot surfaces can cause burns.

- During operation, some parts of the device become very hot. Contact with these parts can burn your skin.
- Disconnect the power supply and secure it. Wait for the surface to cool before you do maintenance.

3.1 Generally applicable rules



Maximum permitted supply voltage

- Make sure that supply power is between 10...60 VDC.
- Supply voltages above 65 VDC, or wrong polarity will destroy the unit.
- Note that the necessary output current is depending on the load torque. Yet, the output current limits are as follows:
 - continuous max. 30 A
 - short-time (acceleration) max. 60 A (< 4 s)



Hot plugging the USB interface may cause hardware damage

If the USB interface is being hot-plugged (connecting while the power supply is on), the possibly high potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Insert the USB connector first, then switch on the power supply of the controller.



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

TOOLS

Tool	Manufacturer	Part Number
Hand crimper for Mini-Fit Sr. crimp terminals	Molex	2002188600
Hand crimper for Mini-Fit crimp terminals	Molex	2002182200
Hand crimper for Mega-Fit crimp terminals	Molex	2238631200
Hand crimper for Micro-Fit 3.0 crimp terminals	Molex	0638190000
Hand crimper for CLIK-Mate crimp terminals	Molex	2002187400

Table 3-10 Recommended tools

3.3 Connection specifications

The actual connection will depend on the overall configuration of your drive system and the type of motor you will be using. Follow the description in given order and choose the wiring diagram (→see page 4-45) that best suits the components you are using.



How to read pin assignment tables

In the subsequent sections of the document, you will come across tables outlining the pin assignments. These tables provide information about the hardware connectors, their corresponding wired signals, the assigned pins, and details regarding the prefab cables that are available.

- The initial column provides the pin numbers for the connectors.
- The second column specifies the pin numbers for the corresponding end (Head A) of the prefab cable.
- The third column describes the core color of the prefab cable.
- The fourth column indicates the pin numbers for the other end (Head B) of the prefab cable.

3.3.1 Power supply (X1)




Figure 3-8 Power supply connector X1

X1 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black	-	GND	Ground
2	2	black	+	V _{CC}	Power supply voltage input (10...60 VDC)

Table 3-11 Power supply connector X1 – Pin assignment


Power cable highest current (P/N 838459)		
		
Cross-section	2 × 4 mm ² , grey	
Length	3 m	
Head A	Plug	Molex Mini-Fit Sr., 2 poles (428160212)
	Contacts	Molex Mini-Fit Sr. female crimp terminals (428150114)
Head B	Wire end sleeves 4 mm ²	

Table 3-12 Power cable highest current

Power supply requirements	
Nominal output voltage V_{CC}	10...60 VDC
Absolute output voltage V_{CC}	min. 8 VDC / max. 62 VDC
Output current	Depending on load <ul style="list-style-type: none"> • continuous max. 30 A • short-time (acceleration) max. 60 A (< 4 s)

Table 3-13 Power supply requirements

- 1) Use the formula below to calculate the required voltage under load.
- 2) Choose a power supply according to the calculated voltage. Thereby consider:
 - a) During braking of the load, the power supply must be capable of buffering the recovered kinetic energy (for example, in a capacitor).
 - b) If you are using an electronically stabilized power supply, make sure that the over current protection circuit is configured inoperative within the operating range.



The formula already takes the following into account:

- Maximum PWM duty cycle of 95 %
- Controller's max. voltage drop of 1 V @ 30 A

KNOWN VALUES:

- Operating torque M [mNm]
- Operating speed n [rpm]
- Nominal motor voltage U_N [Volt]
- Motor no-load speed at U_N ; n_O [rpm]
- Speed/torque gradient of the motor $\Delta n/\Delta M$ [rpm/mNm]

SOUGHT VALUE:

- Supply voltage V_{CC} [Volt]

SOLUTION:

$$V_{CC} \geq \left[\frac{U_N}{n_O} \cdot \left(n + \frac{\Delta n}{\Delta M} \cdot M \right) \cdot \frac{1}{0.95} \right] + 1 [V]$$

3.3.2 Logic supply (X2)




Figure 3-9 Logic supply connector X2

X2 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black	-	GND	Ground
2	2	black	+	V _C	Logic supply voltage input (10...60 VDC)

Table 3-14 Logic supply connector X2 – Pin assignment

Power cable (P/N 275829)		
Cross-section	2 × 0.75 mm ² , grey	
Length	3 m	
Head A	Plug	Molex Mini-Fit Jr., 2 poles (39012020)
	Contacts	Molex Mini-Fit Jr. female crimp terminals (457501112)
Head B	Wire end sleeves 0.75 mm ²	

Table 3-15 Power cable

Logic supply requirements	
Nominal output voltage V _C	10...60 VDC
Absolute output voltage V _C	min. 8 VDC / max. 62 VDC
Min. output power	P _C min. 3 W

Table 3-16 Logic supply requirements

3.3.3 Motor (X3)

The controller is set to drive either maxon EC motor (BLDC, brushless DC motor) or maxon DC motor (brushed DC motor) with separated motor/encoder cable.

3.3.3.1 Motor highest current (X3a)

Motor connector X3a must be used for motors that require a continuous current greater 20 A.




Figure 3-10 Motor connector X3a



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

X3a Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black		Motor winding 1	EC motor: Winding 1
				Motor (+M)	DC motor: Motor +
2	2	black		Motor winding 2	EC motor: Winding 2
				Motor (-M)	DC motor: Motor -
3	3	black		Motor winding 3	EC motor: Winding 3
				-	DC motor: DO NOT CONNECT
-		black		Motor shield	Cable shield

Table 3-17 Motor connector X3a – Pin assignment for maxon EC & DC motor


Motor cable highest current for X3a (P/N 838460)			
A			B
Cross-section	3 × 4 mm ² , shielded, grey		
Length	3 m		
Head A	Plug	Molex Mini-Fit Sr., 3 poles (428160312)	
	Contacts	Molex Mini-Fit Sr. female crimp terminals (428150114)	
	1 × cable lug 4 mm ² for M4 screws		
Head B	Wire end sleeves 4 mm ²		

Table 3-18 Motor cable highest current

3.3.3.2 Motor high current (X3b)

Motor connector X3b can be used for motors that require a continuous current of up to 20 A.



Maximum permitted current

The connector is designed for the following output current:

- X3b: $I_{cont} \leq 20 \text{ A}$




Figure 3-11 Motor connector X3b



Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.

X3b Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black		Motor winding 1	EC motor: Winding 1
				Motor (+M)	DC motor: Motor +
2	2	black		Motor winding 2	EC motor: Winding 2
				Motor (-M)	DC motor: Motor -
3	3	black		Motor winding 3	EC motor: Winding 3
				-	DC motor: DO NOT CONNECT
4	4	black		Motor shield	Cable shield

Table 3-19 Motor connector X3b – Pin assignment for maxon EC & DC motor


Motor cable high current for X3b (P/N 520851)			
A			B
Cross-section	3 × 2.5 mm ² , shielded, grey		
Length	3 m		
Head A	Plug	Molex Mega-Fit, 4 poles (1716920104)	
	Contacts	Molex Mega-Fit female crimp terminals (1720630311)	
Head B	Wire end sleeves 2.5 mm ²		

Table 3-20 Motor cable high current

3.3.4 Sensor 1 Hall sensor (X4)




Figure 3-12 Sensor 1 Hall sensor connector X4

X4 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	green		Hall sensor 1	Hall sensor 1 input
2	2	brown		Hall sensor 2	Hall sensor 2 input
3	3	white		Hall sensor 3	Hall sensor 3 input
4	4	yellow		GND	Ground
5	5	grey		V _{Sensor}	Sensor supply voltage output (5 VDC / I _L ≤ 145 mA)
6	6	black		Hall shield	Cable shield

Table 3-21 Sensor 1 Hall sensor connector X4 – Pin assignment


Hall sensor cable (P/N 275878)		
		B
Cross-section	5 × 0.14 mm ² , shielded, grey	
Length	3 m	
Head A	Plug	Molex Micro-Fit 3.0, 6 poles (430250600)
	Contacts	Molex Micro-Fit 3.0 female crimp terminals (430300010)
Head B	Wire end sleeves 0.14 mm ²	

Table 3-22 Sensor 1 Hall sensor cable



Important Notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors → Chapter “3.3.4 Sensor 1 Hall sensor (X4)” on page 3-22
- Incremental encoders → Chapter “3.3.5.1 Incremental encoder” on page 3-26
- SSI / BiSS C encoders → Chapter “3.3.5.2 SSI / BiSS C unidirectional absolute encoder (future release)” on page 3-27
- High-speed digital I/Os → Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Digital I/Os → Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

Hall sensor	
Sensor supply voltage output V _{Sensor}	5 VDC
Max. Hall sensor supply current	145 mA (→ refer to Important Notice)
Input voltage	0...24 VDC
Max. input voltage	24 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.0 VDC
Internal pull-up resistor	2.7 kΩ (referenced to 5.45 VDC - 0.6 VDC)

Table 3-23 Sensor 1 Hall sensor specification

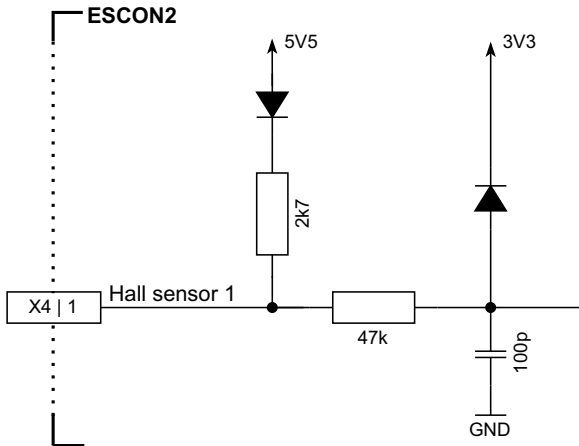


Figure 3-13 Sensor 1 Hall sensor input circuit (analogously valid for Hall sensors 2 & 3)

3.3.5 Sensor 2 Encoder / I/Os (X5)

Additional sensors, both incremental and serial encoders, or digital inputs and outputs can be connected. Only one sensor/function can be used at a time, i.e. either an incremental encoder, or an absolute encoder, or high-speed digital I/Os.



Best practice

For best performance and good resistance against electrical interference, **we recommend using encoders with a line driver (differential scheme)**. Otherwise, limitations may apply due to slow switching edges. Nevertheless, the controller supports both schemes – differential and single-ended (unsymmetrical).




Figure 3-14 Sensor 2 connector X5

X5 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	brown	1	Data	Data (SSI, BiSS C)
				HsDigIN4	High-speed digital input 4
2	2	white	2	V_{Sensor}	Sensor supply voltage output (5 VDC / $I_L \leq 145$ mA)
3	3	red	3	GND	Ground
4	4	white	4	Clock	Clock (SSI, BiSS C)
				HsDigOUT1	High-speed digital output 1
5	5	orange	5	Channel A\	Digital incremental encoder channel A complement
				HsDigIN1\	High-speed digital input 1 complement
6	6	white	6	Channel A	Digital incremental encoder channel A
				HsDigIN1	High-speed digital input 1
7	7	yellow	7	Channel B\	Digital incremental encoder channel B complement
				HsDigIN2\	High-speed digital input 2 complement
8	8	white	8	Channel B	Digital incremental encoder channel B
				HsDigIN2	High-speed digital input 2
9	9	green	9	–	not connected
10	10	white	10	HsDigIN3	High-speed digital input 3

Table 3-24 Sensor 2 connector X5 – Pin assignment


Encoder cable (P/N 275934)	
	
Cross-section	10 × AWG28, round-jacket, flat cable, pitch 1.27 mm
Length	3 m
Head A	DIN 41651 female, pitch 2.54 mm, 10 poles, with strain relief
Head B	DIN 41651 plug, pitch 2.54 mm, 10 poles, with strain relief

Table 3-25 Encoder cable



Important Notice

The maximum supply current of the sensor supply voltage output V_{Sensor} is in total 145 mA. It can be used for:

- Hall sensors → Chapter “3.3.4 Sensor 1 Hall sensor (X4)” on page 3-22
- Incremental encoders → Chapter “3.3.5.1 Incremental encoder” on page 3-26
- SSI / BiSS C encoders → Chapter “3.3.5.2 SSI / BiSS C unidirectional absolute encoder (future release)” on page 3-27
- High-speed digital I/Os → Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Digital I/Os → Chapter “3.3.6 Digital I/Os (X7)” on page 3-31
- Other peripherals which need a 5 VDC supply.

All currents resulting from parts connected to the sensor supply voltage output V_{Sensor} must not exceed 145 mA in total.

3.3.5.1 Incremental encoder

Digital incremental encoder (differential)	
Sensor supply voltage output V_{Sensor}	5 VDC
Max. sensor supply current	$\leq 145 \text{ mA}$ (→refer to Important Notice)
Min. differential input voltage	$\pm 200 \text{ mV}$
Max. input voltage	$\pm 12 \text{ VDC}$
Line receiver (internal)	EIA/RS422 standard
Max. input frequency	6.67 MHz

Table 3-26 Differential digital incremental encoder specification

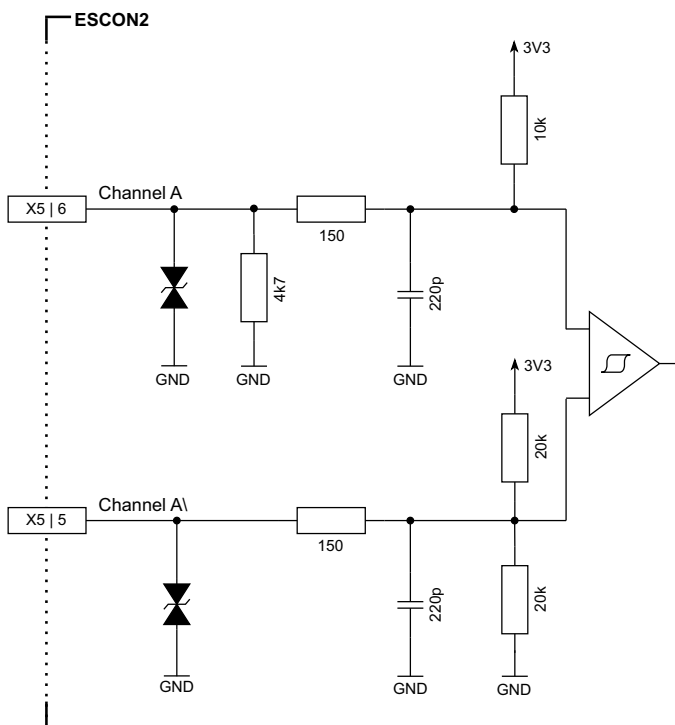


Figure 3-15 Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)

Digital incremental encoder (single-ended)		
Sensor supply voltage output V_{Sensor}	5 VDC	
Max. sensor supply current	$\leq 145 \text{ mA}$ (→refer to Important Notice)	
Input voltage	0...5 VDC	
Max. input voltage	$\pm 12 \text{ VDC}$	
Low-level input voltage	$< 1 \text{ VDC}$	
High-level input voltage	$> 2.4 \text{ VDC}$	
Input high current	I_{IH} = typically 1.3 mA @ 5 VDC	
Input low current	I_{IL} = typically -0.36 mA @ 0 VDC	
Max. input frequency	Push-pull	6.25 MHz
	Open collector	100 kHz (additional external 3k3 pull-up)

Table 3-27 Single-ended digital incremental encoder specification

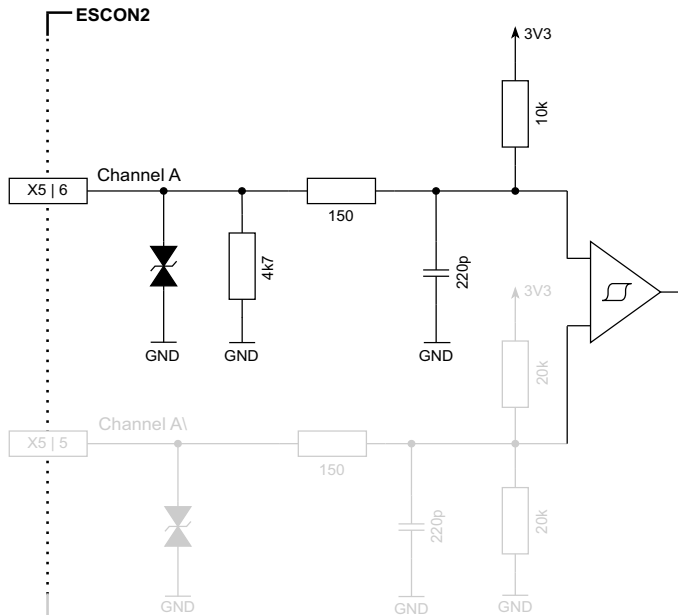


Figure 3-16 Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)

3.3.5.2 SSI / BiSS C unidirectional absolute encoder (future release)

The functionality will only be available with a future firmware release.

SSI / BiSS C unidirectional absolute encoder (single-ended)		
Sensor supply voltage output V_{Sensor}	5 VDC	
Max. sensor supply current	$\leq 145 \text{ mA}$ (→refer to Important Notice)	
Clock frequency	SSI	0.1...2 MHz
	BiSS C	0.1...4 MHz

Table 3-28 SSI / BiSS C unidirectional absolute encoder specification

SSI / BiSS C unidirectional absolute encoder data channel	
Input voltage	0...5 VDC
Max. input voltage	$\pm 12 \text{ VDC}$
Low-level input voltage	$< 1.0 \text{ VDC}$
High-level input voltage	$> 2.4 \text{ VDC}$
Input high current	I_{IH} = typically 0.34 mA @ 5 VDC (→refer to Important Notice)
Input low current	I_{IL} = typically 0 mA @ 0 VDC (→refer to Important Notice)
Max. input frequency	6.25 MHz
Total reaction time	$< 1.5 \text{ ms}$

Table 3-29 Single-ended SSI / BiSS C unidirectional absolute encoder data channel specification

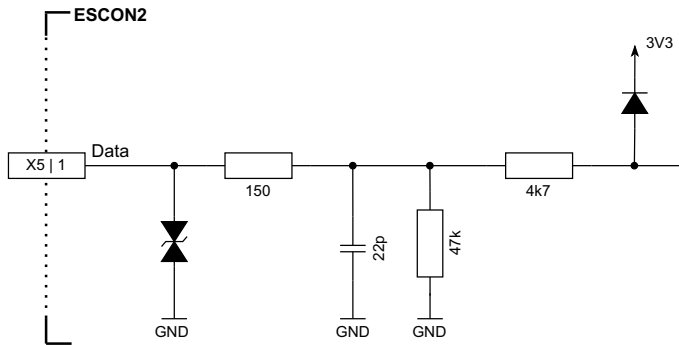


Figure 3-17 SSI absolute encoder data input (analogously valid for BiSS C)

SSI / BiSS C unidirectional absolute encoder clock channel		
Output voltage	3.3 VDC	
Output resistance	47 Ω	
Max. output current	24 mA	
Clock frequency	SSI	0.1...2 MHz
	BiSS C	0.1...4 MHz

Table 3-30 Single-ended SSI / BiSS C unidirectional absolute encoder clock channel specification

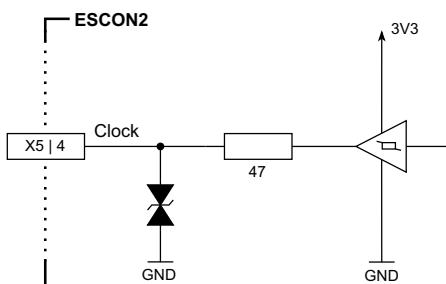


Figure 3-18 SSI absolute encoder clock output (analogously valid for BiSS C)

3.3.5.3 High-speed digital I/Os

Alternatively, the sensor interface can be used for high-speed digital I/O operation.



Encoder cable (P/N 275934)	
	
Cross-section	10 × AWG28, round-jacket, flat cable, pitch 1.27 mm
Length	3 m
Head A	DIN 41651 female, pitch 2.54 mm, 10 poles, with strain relief
Head B	DIN 41651 plug, pitch 2.54 mm, 10 poles, with strain relief

Table 3-31 Encoder cable

High-speed digital input 1...2 (differential)	
Max. input voltage	± 12 VDC
Min. differential input voltage	± 200 mV
Line receiver (internal)	EIA/RS422 standard
Max. input frequency	6.67 MHz
Total reaction time	< 1.5 ms

Table 3-32 Differential high-speed digital input specification

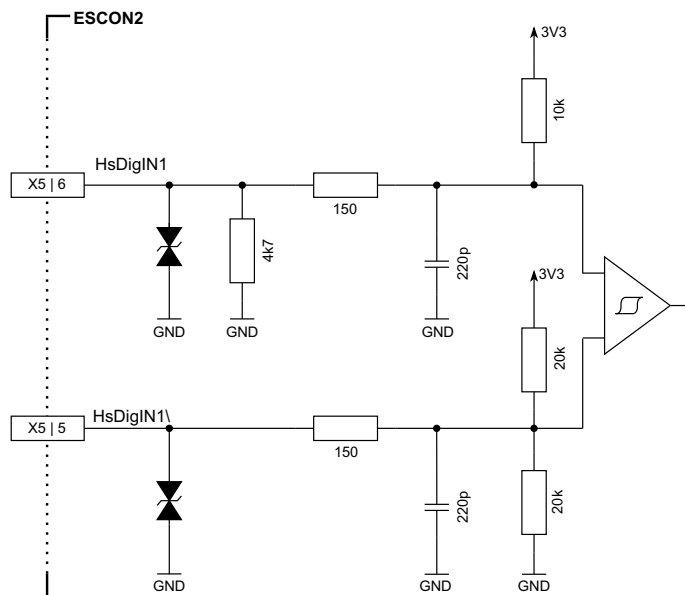


Figure 3-19 HsDigIN1 circuit “differential” (analogously valid for HsDigIN2)

High-speed digital input 1...4 (single-ended)		
Input voltage	0...5 VDC	
Max. input voltage	± 12 VDC	
Low-level input voltage	< 1.0 VDC	
High-level input voltage	> 2.4 VDC	
Input high current	HsDigIN1...3	I_{IH} = typically 1.3 mA @ 5 VDC (→refer to Important Notice)
	HsDigIN4	I_{IH} = typically 0.34 mA @ 5 VDC (→refer to Important Notice)
Input low current	HsDigIN1...3	I_{IL} = typically -0.36 mA @ 0 VDC (→refer to Important Notice)
	HsDigIN4	I_{IL} = typically 0 mA @ 0 VDC (→refer to Important Notice)
Max. input frequency	6.25 MHz	
Total reaction time	< 1.5 ms	

Table 3-33 Single-ended high-speed digital input specification

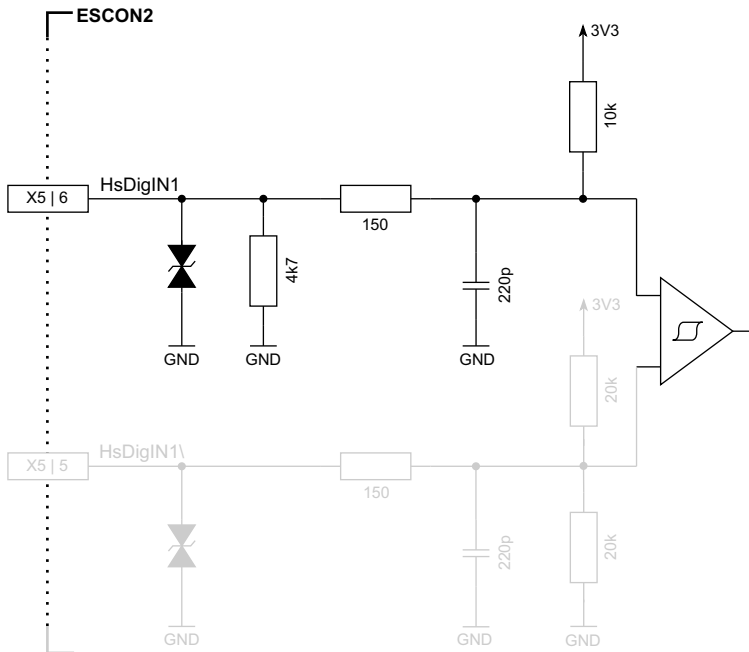


Figure 3-20 HsDigIN1 circuit "single-ended" (analogously valid for HsDigIN2...3)

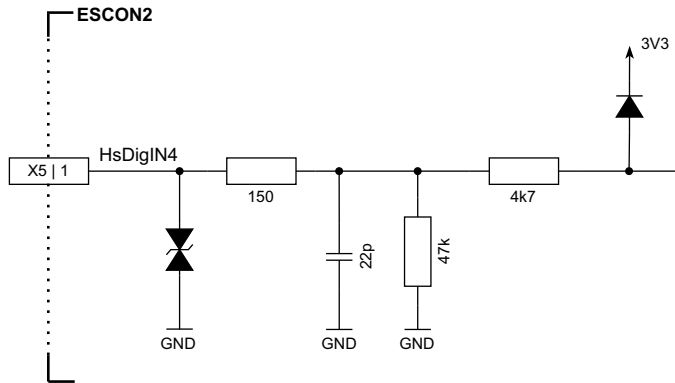


Figure 3-21 HsDigIN4 circuit "single-ended"

High-speed digital output 1	
Output voltage	3.3 VDC
Output resistance	47 Ω
Max. output current	24 mA
Max. output frequency	25 kHz

Table 3-34 High-speed digital output specification

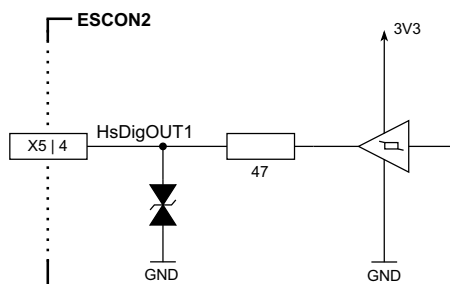


Figure 3-22 HsDigOUT1 circuit

3.3.6 Digital I/Os (X7)




Figure 3-23 Digital I/Os connector X7

X7 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	white		DigIN1	Digital input 1
2	2	brown		DigIN2	Digital input 2
3	3	green		DigIN3	Digital input 3
4	4	yellow		DigIN4	Digital input 4
5	5	grey		DigOUT1	Digital output 1
6	6	pink		DigOUT2	Digital output 2
7	7	blue		GND	Ground
8	8	red		V _{IO}	V _{IO} = 5 VDC - 0.75 VDC = 4.25 VDC

Table 3-35 Digital I/Os connector X7 – Pin assignment


Signal cable 8core (P/N 520853)		
A		B
Cross-section	8 × 0.14 mm ² , grey	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 8 poles (5025780800)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Wire end sleeves 0.14 mm ²	

Table 3-36 Signal cable 8core

Digital inputs 1...2	
Input voltage	0...25 VDC
Max. input voltage	±25 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.1 VDC
Input resistance	typically 47 kΩ < 3.3 VDC typically 37 kΩ @ 5 VDC typically 25 kΩ @ 24 VDC
Input current at logic 1	typically 135 μA @ 5 VDC
Hardware switching delay	< 6 μs
Total reaction time	< 2.3 ms
PWM duty cycle (resolution)	10...90 % (0.1 %)
PWM frequency	50 Hz...10 kHz
PWM accuracy	typically +0.1 % absolute @ 50 Hz / 5 VDC typically +1.5 % absolute @ 10 kHz / 5 VDC

Table 3-37 Digital inputs 1...2 specification

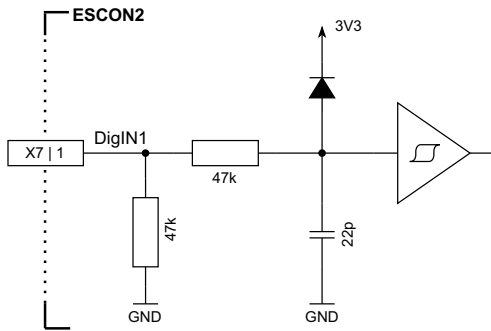


Figure 3-24 DigIN1 circuit (analogously valid for DigIN2)

Digital inputs 3...4	
Input voltage	0...25 VDC
Max. input voltage	±25 VDC
Low-level input voltage	< 0.8 VDC
High-level input voltage	> 2.1 VDC
Input resistance	typically 47 kΩ < 3.3 VDC typically 37 kΩ @ 5 VDC typically 25 kΩ @ 24 VDC
Input current at logic 1	typically 135 μA @ 5 VDC
Hardware switching delay	< 300 μs
Total reaction time	< 2.3 ms

Table 3-38 Digital inputs 3...4 specification

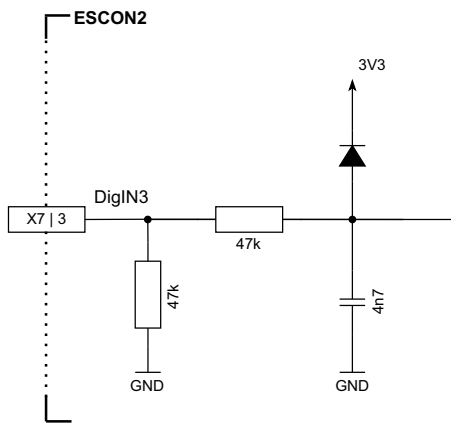


Figure 3-25 DigIN3 circuit (analogously valid for DigIN4)

Digital outputs 1...2 "sink"	
Max. input voltage	36 VDC
Max. load current	500 mA
Max. voltage drop	0.25 VDC @ 500 mA
Max. load inductance	100 mH @ 24 VDC; 500 mA with internal clamping typically 45 VDC
Max. output frequency	25 kHz

Table 3-39 Digital outputs specification – Sinks

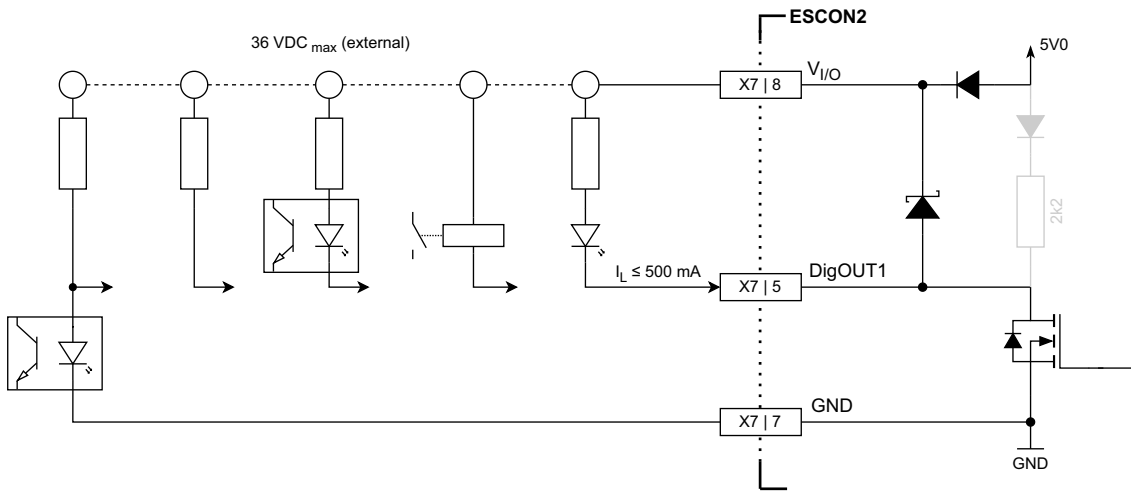


Figure 3-26 DigOUT1 "sinks" (analogously valid for DigOUT2)



Freewheeling diode for inductive loads

When utilizing the digital output load switch for the operation of inductive loads, such as relays, and $V_{I/O}$ is not used, it is essential to confirm the presence of a freewheeling diode to prevent potential harm to the hardware. If possible, install the freewheeling diode at the load.

Digital outputs 1...2 "source"	
Output voltage	$V_{Out} = 5 \text{ VDC} - 0.75 \text{ VDC} - (I_L \times 2'200 \Omega)$
Max. load current	$I_L \leq 2 \text{ mA}$

Table 3-40 Digital outputs specification – Sources

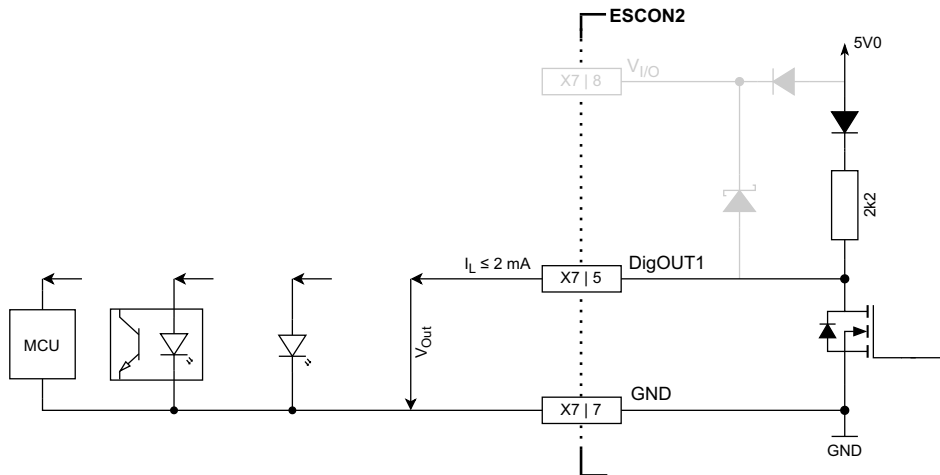


Figure 3-27 DigOUT1 “source” (analogously valid for DigOUT2)

3.3.7 Analog I/Os (X8)




Figure 3-28 Analog I/Os connector X8

X8 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	white		AnIN1+	Analog input 1 positive signal
2	2	brown		AnIN1-	Analog input 1 negative signal
3	3	green		AnIN2+	Analog input 2 positive signal
4	4	yellow		AnIN2-	Analog input 2 negative signal
5	5	grey		AnOUT1	Analog output 1
6	6	pink		AnOUT2	Analog output 2
7	7	blue		GND	Ground

Table 3-41 Analog I/Os connector X8 – Pin assignment

Signal cable 7core (P/N 520854)			
		B	
Cross-section	7 × 0.14 mm ² , grey		
Length	3 m		
Head A	Plug	Molex CLIK-Mate, single row, 7 poles (5025780700)	
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)	
Head B	Wire end sleeves 0.14 mm ²		

Table 3-42 Signal cable 7core

Analog inputs 1...2		
Input voltage	±10 VDC (differential)	
Max. input voltage	±24 VDC	
Common mode voltage	-5...+10 VDC (referenced to GND)	
Input resistance	differential	80 kΩ
	referenced to GND	65 kΩ
A/D converter	12-bit	
Resolution	5.64 mV	
Bandwidth	10 kHz	

Table 3-43 Analog input specification

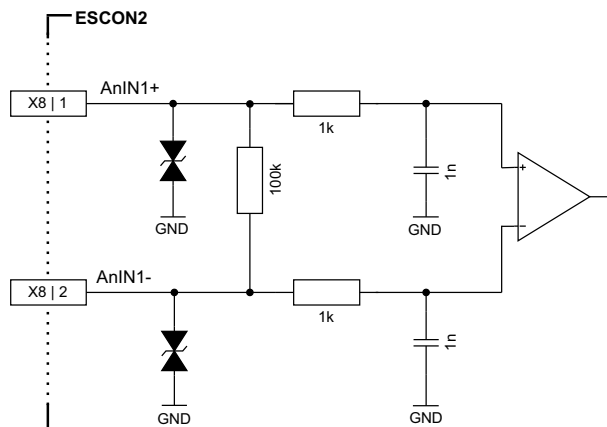


Figure 3-29 AnIN1 circuit (analogously valid for AnIN2)

Analog outputs 1...2	
Output voltage	±4 VDC
D/A converter	12-bit
Resolution	2.42 mV
Refresh rate	50 kHz
Analog bandwidth of output amplifier	25 kHz
Max. capacitive load	300 nF Note: The increase rate is limited in proportion to the capacitive load (e.g. 5 V/ms @ 300 nF)
Max. output current limit	1 mA

Table 3-44 Analog output specification

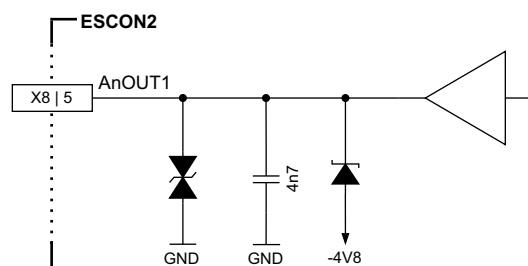


Figure 3-30 AnOUT1 circuit (analogously valid for AnOUT2)

3.3.8 CAN 1 (X11) & CAN 2 (X12)

The ESCON2 is specially designed being commanded and controlled via a Controller Area Network (CAN), a highly efficient data bus very common in all fields of automation and motion control. It is preferably used as a slave node in the CANopen network.

For the CAN configuration check → Chapter “3.4 DIP switch configuration (SW1)” on page 3-41.




Figure 3-31 CAN 1 connector X11/CAN 2 connector X12

X11/12 Pin	Head A Pin	Prefab cable			Signal	Description
		Cable color	P/N 520858 Head B Pin	P/N 520857 Head B Pin		
1	1	white	1	7	CAN high	CAN bus high line
2	2	brown	2	2	CAN low	CAN bus low line
3	3	green	3	3	GND	Ground
4	4	yellow	4	5	CAN shield	Cable shield

Table 3-45 CAN 1 connector X11/CAN 2 connector X12 – Pin assignment



CAN-CAN cable (P/N 520858)		
		
Cross-section	2 × 2 × 0.14 mm ² , twisted pair, shielded	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 4 poles (5025780400)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Plug	Molex CLIK-Mate, single row, 4 poles (5025780400)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)

Table 3-46 CAN-CAN cable



CAN-COM cable (P/N 520857)		
		
Cross-section	2 × 2 × 0.14 mm ² , twisted pair, shielded	
Length	3 m	
Head A	Plug	Molex CLIK-Mate, single row, 4 poles (5025780400)
	Contacts	Molex CLIK-Mate crimp terminals (5025790000)
Head B	Female D-Sub connector DIN 41652 9 poles, with mounting screws	

Table 3-47 CAN-COM cable

CAN interface	
Standard	ISO 11898-2:2003
Max. bit rate	1 Mbit/s
Max. number of CAN nodes	31/127 (via hardware/software setting)
Protocol	CiA 301 version 4.2.0
Node-ID setting	By DIP switch or software

Table 3-48 CAN interface specification



Note

- Consider the CAN master's maximal bit rate.
- The standard bit rate setting (factory setting) is 1 Mbit/s.
- Use 120 Ω termination resistor at both ends of the CAN bus.
- For detailed CAN information see separate document → «ESCON2 Communication Guide».

3.3.9 USB (X13)



Hot plugging the USB interface may cause hardware damage

If the USB interface is being hot-plugged (connecting while the power supply is on), the possibly high potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Insert the USB connector first, then switch on the power supply of the controller.




Figure 3-32 USB connector X13

USB Type C - Type C cable (P/N 845854)	
A	B
USB standard	USB 3.2
Length	1.5 m
Head A	USB Type C
Head B	USB Type C

Table 3-49 USB Type C – Type C cable

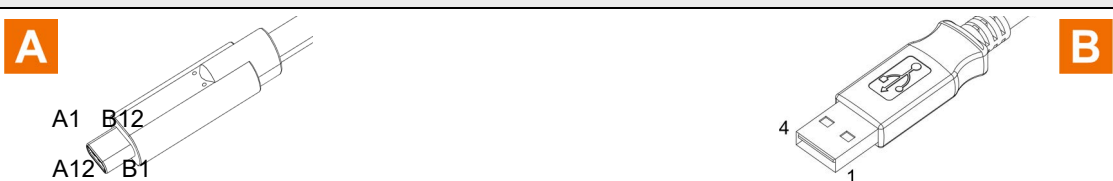
USB Type A - Type C cable (P/N 838461)	
	
USB standard	USB 2.0 / USB 3.0
Length	1.5 m
Head A	USB Type C
Head B	USB Type A

Table 3-50 USB Type A – Type C cable

USB	
Data signaling rate	12 Mbit/s (Full speed)
Max. bus supply voltage V_{BUS}	5.25 VDC
Max. DC data input voltage	-0.3...+3.8 VDC

Table 3-51 USB interface specification

3.3.10 Motor temperature sensor (X16) (future release)

The functionality will only be available with a future firmware release.





Figure 3-33 Motor temperature sensor connector X16

X16 Pin	Prefab cable			Signal	Description
	Head A Pin	Cable color	Head B Pin		
1	1	black		GND	Ground
2	2	red		MotorTemp	Motor temperature sensor input

Table 3-52 Motor temperature sensor connector X16 – Pin assignment

NTC cable (P/N 847301)	
	
Cross-section	$2 \times 0.5 \text{ mm}^2$, grey
Length	3 m

NTC cable (P/N 847301)		
Head A	Plug	Molex Micro-Fit 3.0, 2 poles (430250200)
	Contacts	Molex Micro-Fit 3.0 female crimp terminals (0430300001)
Head B	Wire end sleeves 0.5 mm ²	

Table 3-53 NTC cable

Motor temperature sensor input	
Input voltage	0...3.3 VDC
Max. input voltage	+24 VDC
A/D converter	12-bit
Internal pull-up resistor	3.3 k Ω (referenced to 3.3 VDC)

Table 3-54 Motor temperature sensor – specifications

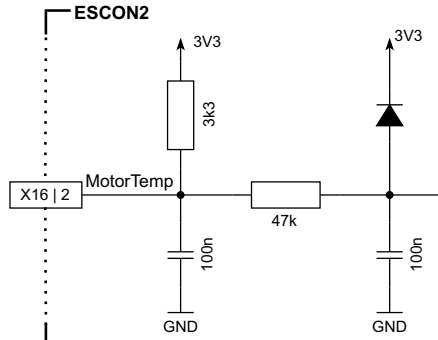


Figure 3-34 Motor temperature circuit

3.4 DIP switch configuration (SW1)

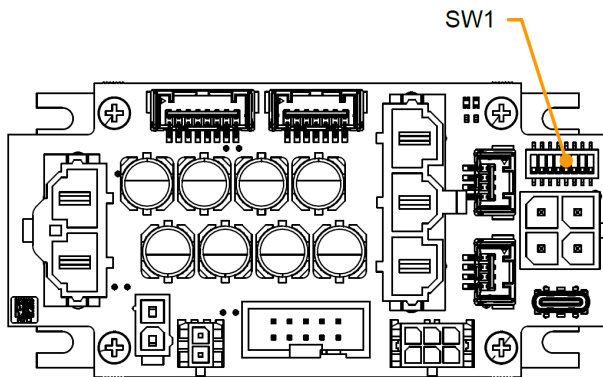


Figure 3-35 DIP switch SW1



DIP switch 8 has no functionality assigned and is not connected.

3.4.1 CAN ID (Node-ID)

The device's identification (subsequently called "ID") can be set by means of DIP switches 1...5 or software using binary code.



Setting the ID by DIP switch SW1

- DIP switches 6...8 do not have any impact on the ID.

Setting	Switch	Binary Code	Valence
<p>(factory setting)</p>	1	2^0	1
	2	2^1	2
	3	2^2	4
	4	2^3	8
	5	2^4	16

Table 3-55 DIP switch SW1 – Binary code values

Continued on next page.

The set ID can be observed by adding the valence of all activated switches. Use the following table as a (non-concluding) guide:









Setting	Switch					ID
	1	2	3	4	5	
 ON OFF	0	0	0	0	0	–
 ON OFF	1	0	0	0	0	1
 ON OFF	0	1	0	0	0	2
 ON OFF	0	0	1	0	0	4
 ON OFF	1	0	1	0	0	5
 ON OFF	0	0	0	1	0	8
 ON OFF	0	0	0	0	1	16
 ON OFF	1	1	1	1	1	31
0 = Switch "OFF" 1 = Switch "ON"						

Table 3-56 DIP switch SW1 – Examples

SETTING THE ID BY MEANS OF «MOTION STUDIO»

- The ID may be set by software (changing object 0x2000 «Node-ID», range 1...127).
- The ID set by software is valid if the ID is set to "0" (DIP switches 1...5 set to OFF).

3.4.2 CAN automatic bit rate detection

With this function, the CANopen interface can be put in a "listen only" mode. For further details see separate document → «ESCON2 Firmware Specification». Automatic bit rate detection is activated with DIP switch 6.



Switch	OFF	ON
6	 <p>Automatic bit rate detection deactivated</p>	 <p>Automatic bit rate detection activated (factory setting)</p>

Table 3-57 DIP switch SW1 – CAN automatic bit rate detection

3.4.3 CAN bus termination

A 120 Ω termination resistor can be "activated" with DIP switch 7.



Switch	OFF	ON
7	 <p>Without bus termination (factory setting)</p>	 <p>Bus termination with 120 Ω</p>

Table 3-58 DIP switch SW1 – CAN bus termination

3.5 Status indicators

The ESCON2 features a set of LED indicators to display the device condition.

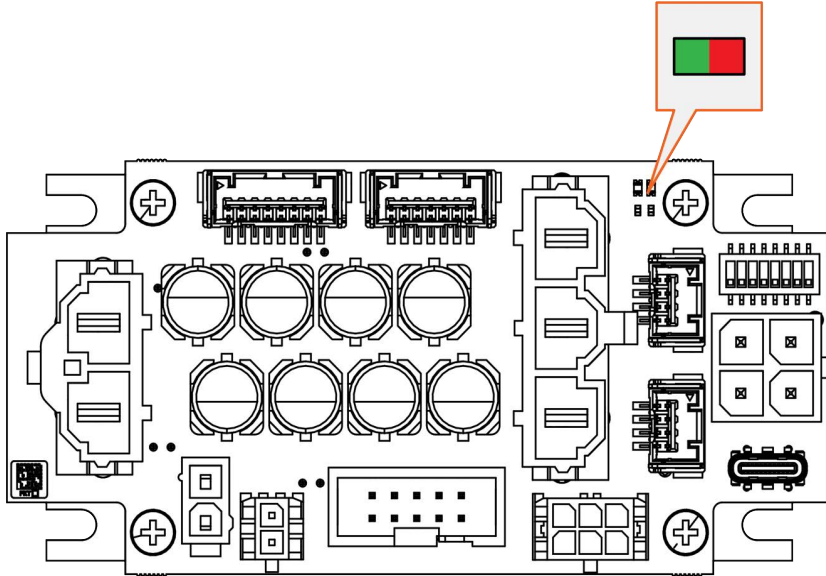


Figure 3-36 LEDs – Location

The LEDs display the actual status and possible warnings and errors of the ESCON2:

- Green LED shows the operation status
- Red LED indicates warnings and errors

LED		Warning / Error	Description
Green	Red		
Slow	OFF	No warning/error active.	Power stage is disabled. The ESCON2 is in status <ul style="list-style-type: none"> • Switch on disabled
Slow	Slow	At least one warning is active.	<ul style="list-style-type: none"> • Ready to switch on • Switched on
ON	OFF	No warning/error active.	Power stage is enabled. The ESCON2 is in status <ul style="list-style-type: none"> • Operation enabled
ON	Slow	At least one warning is active.	<ul style="list-style-type: none"> • Quick stop active
ON	ON	At least one error has occurred.	Power stage is enabled. The ESCON2 is in temporary status <ul style="list-style-type: none"> • Fault reaction active
OFF	ON	At least one error has occurred.	Power stage is disabled. The ESCON2 is in status <ul style="list-style-type: none"> • Fault
Flash	ON	n/a	Firmware update in progress or invalid application

Slow = LED is slowly blinking (0.5 s OFF, 0.5 s ON)
Flash = LED is flashing (0.9 s OFF, 0.1 s ON)

Table 3-59 Device status LEDs

4 WIRING

In this section you will find the wiring information for the setup you are using. You can either use the consolidated wiring diagrams (see →Figure 4-38) featuring the full scope of interconnectivity and pin assignment. Or you may wish to use the connection overviews for either DC motor or EC (BLDC) motor that will assist you in determining the wiring for your particular motor type and the appropriate feedback signals.


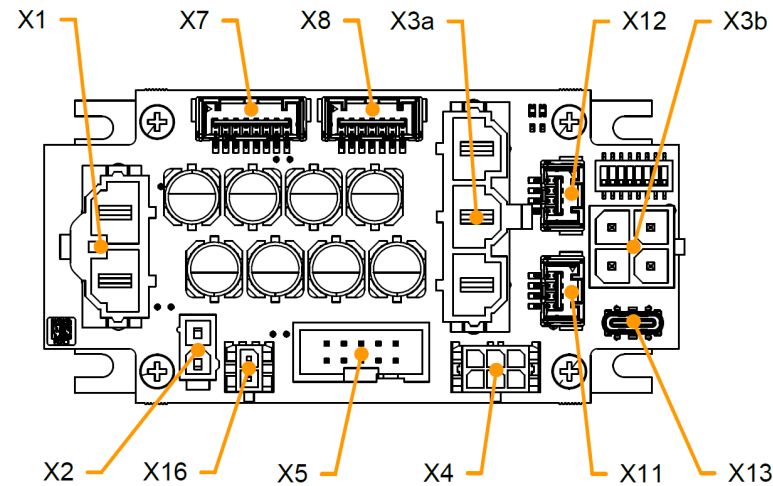


Figure 4-37 Interfaces – Designations and location



Signs and abbreviations used

The subsequent diagrams feature these signs and abbreviations:

- «EC motor» stands for brushless EC motor (BLDC).
-  Ground safety earth connection (optional).

4.1 Possible combinations to connect a motor

The following tables show feasible ways on how to connect the motor with its respective feedback signals or possible combinations thereof. To find the wiring that best suits your setup, proceed as follows:

- 1) Decide on the type of motor you are using and go to the respective subsection;
For DC motor, see →Chapter “4.1.1 DC motor” on page 4-46 or
For EC (BLDC) motor, see →Chapter “4.1.2 EC (BLDC) motor” on page 4-46.
- 2) Connect the power supply and the logic supply as shown in the referenced figure.
- 3) Check-out the listing for the combination that best suits your setup. Pick the wiring method # and go to the respective table;
For DC motor see →Table 4-60,
For EC (BLDC) motor see →Table 4-61.
- 4) Pick the row with the corresponding wiring method # and refer to the listed figure(s) to find the relevant wiring information.

4.1.1 DC motor

Power supply

Power supply and optional logic supply Figure 4-39 / Figure 4-40

Motor & feedback signals

Without sensor Method # DC1 [a]

Digital incremental encoder Method # DC2

SSI / BISS C unidirectional absolute encoder Method # DC3 [b]

Method #	Sensor 2		→Figure(s)
	Digital incremental encoder	SSI / BISS C unidirectional absolute encoder [b]	
DC1 [a]			4-41
DC2	✓		4-41 4-44
DC3 [b]		✓	4-41 4-45

[a] For method # DC1, only the operating mode current control can be used.

[b] The functionality will be available with a future firmware release.

Table 4-60 Possible combinations of feedback signals for DC motor

4.1.2 EC (BLDC) motor

Power supply

Power supply and optional logic supply Figure 4-39 / Figure 4-40

Motor & feedback signals

Hall sensors Method # EC1

Hall sensors & Digital incremental encoder Method # EC2

Hall sensors & SSI / BISS C unidirectional absolute encoder Method # EC3 [a]

SSI / BISS C unidirectional absolute encoder Method # EC4 [a]

Method #	Sensor 1	Sensor 2		→Figure(s)
	Hall sensors	Digital incremental encoder	SSI / BISS C unidirectional absolute encoder [a]	
EC1	✓			4-42 4-43
EC2	✓	✓		4-42 4-43 4-44
EC3 [a]	✓		✓	4-42 4-43 4-45
EC4 [a]			✓	4-42 4-45

[a] The functionality will be available with a future firmware release.

Table 4-61 Possible combinations of feedback signals for EC (BLDC) motor

4.2 Main wiring diagram

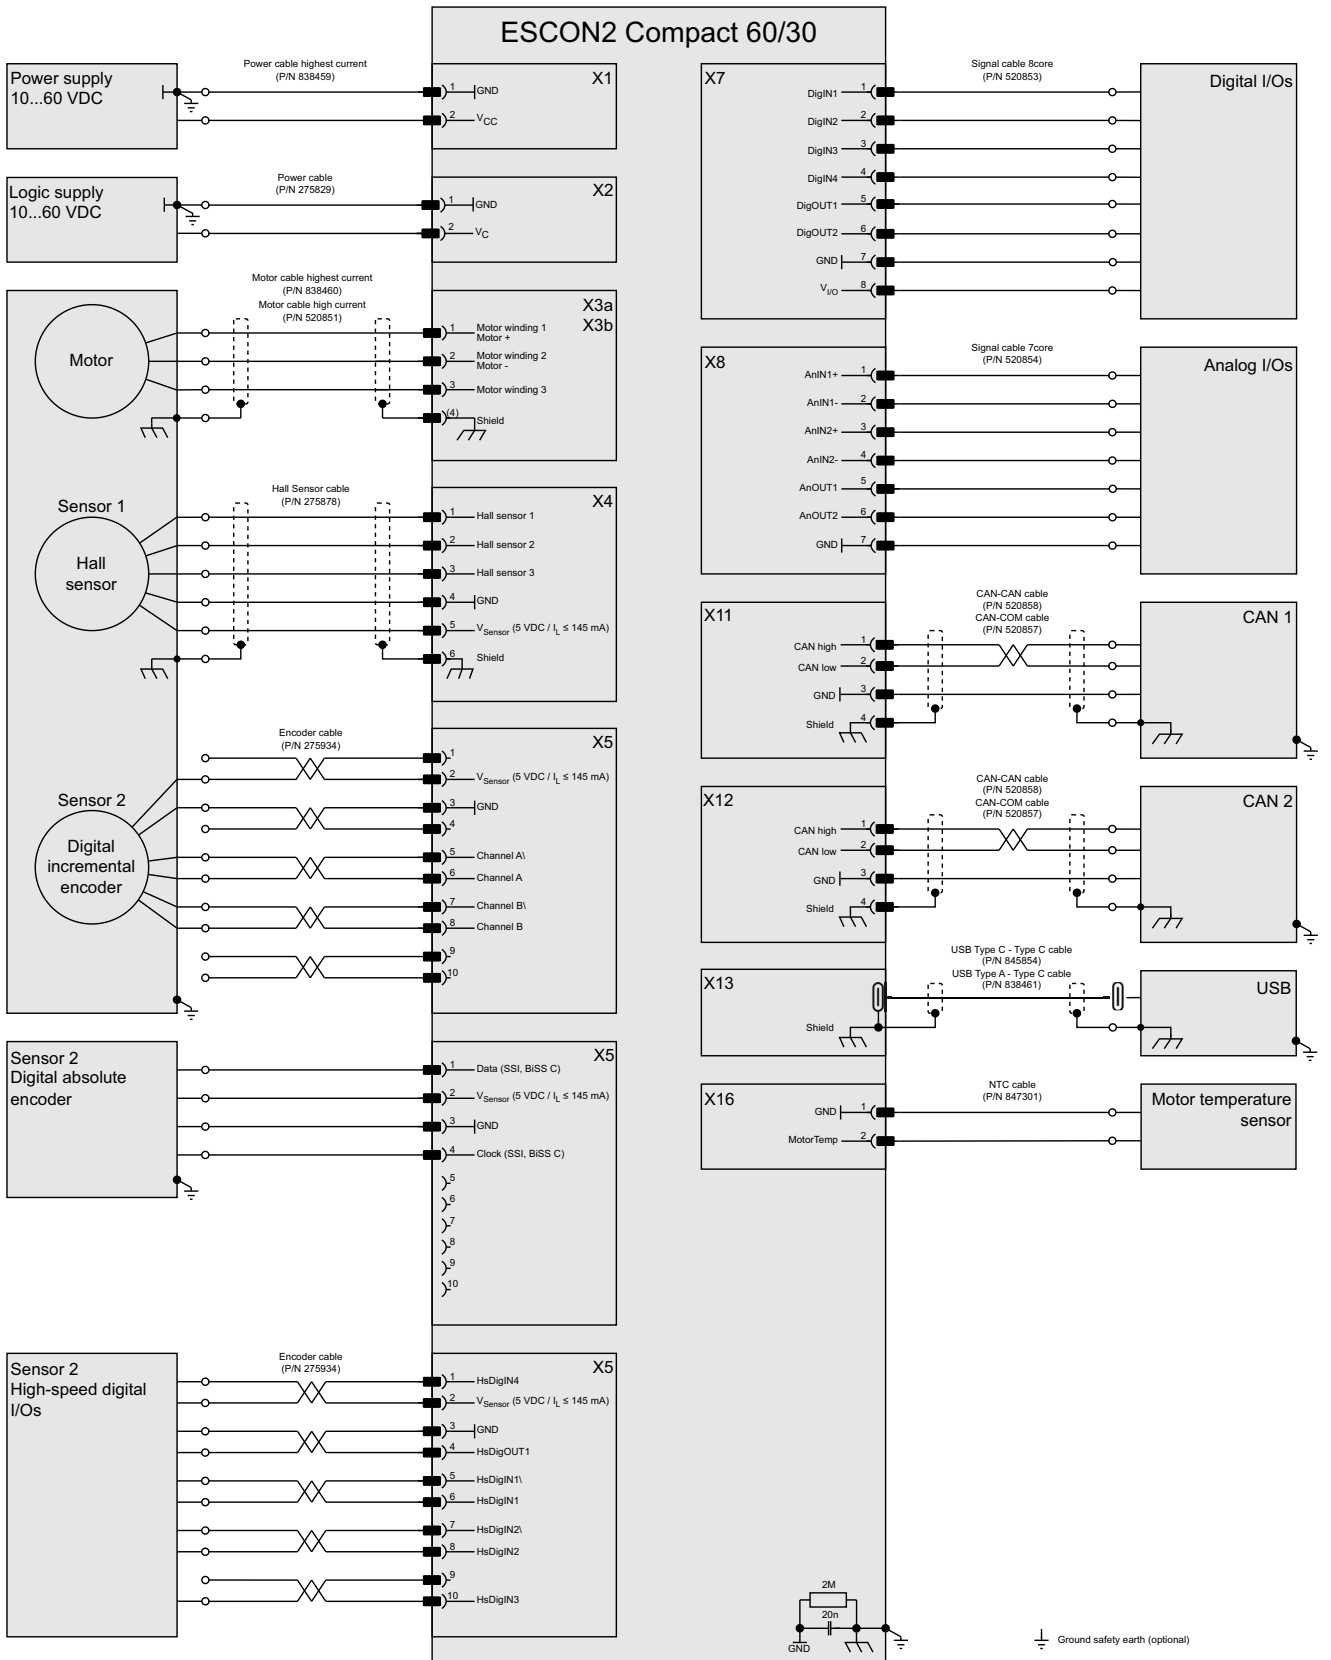


Figure 4-38 Main wiring diagram

4.3 Excerpts

4.3.1 Power supply

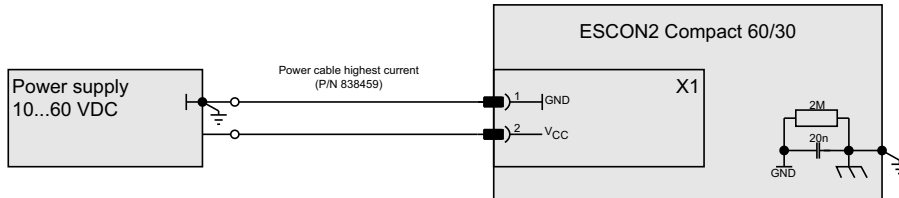


Figure 4-39 Power supply

4.3.2 Logic supply

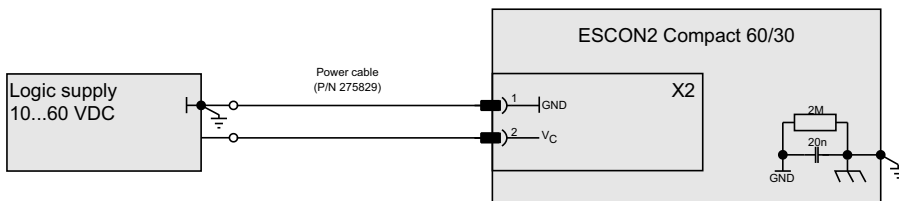


Figure 4-40 Logic supply

4.3.3 DC motor

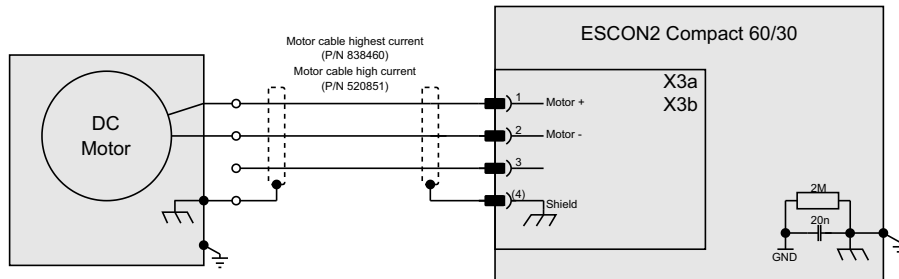


Figure 4-41 DC motor

The "Motor cable high current" (P/N 520851) can be used for currents up to 20 A. For higher currents, the "Motor cable highest current" (P/N 838460) must be used.

4.3.4 EC (BLDC) motor

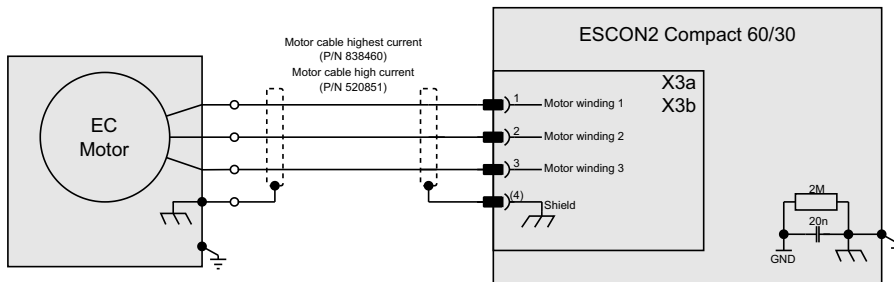


Figure 4-42 EC (BLDC) motor

The "Motor cable high current" (P/N 520851) can be used for currents up to 20 A. For higher currents, the "Motor cable highest current" (P/N 838460) must be used.

4.3.5 Sensor 1 Hall sensor

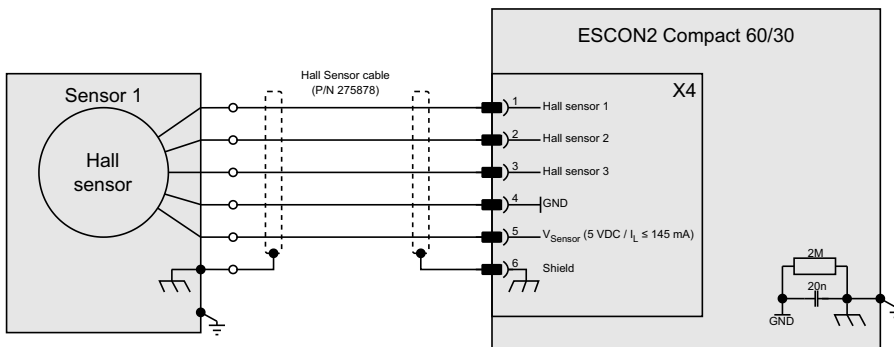


Figure 4-43 Sensor 1 Hall sensor

4.3.6 Sensor 2 Encoder / I/Os

4.3.6.1 Digital incremental encoder

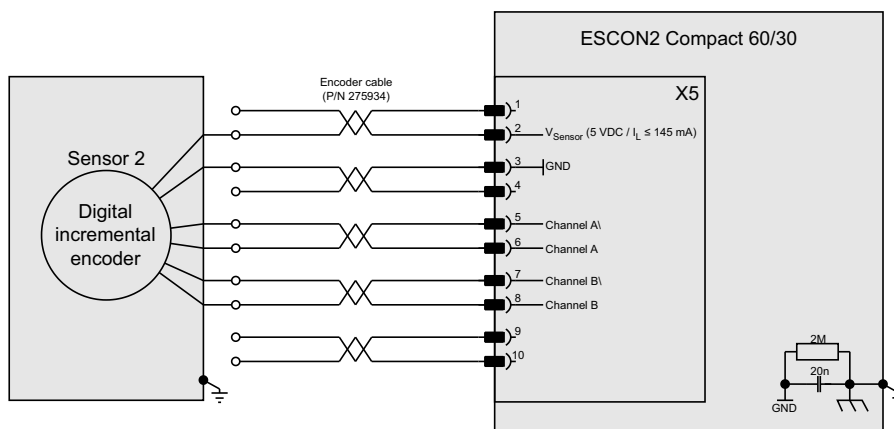


Figure 4-44 Digital incremental encoder

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

4.3.6.2 SSI / BiSS C unidirectional absolute encoder (future release)

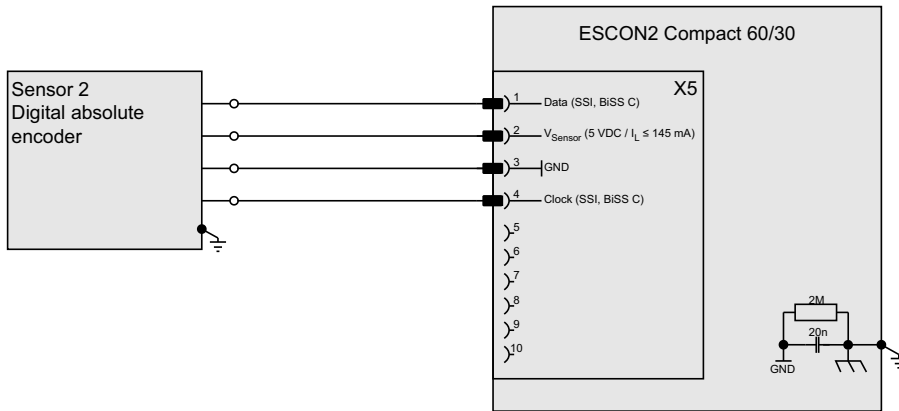


Figure 4-45 SSI / BiSS C unidirectional absolute encoder

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

4.3.6.3 High-speed digital I/Os

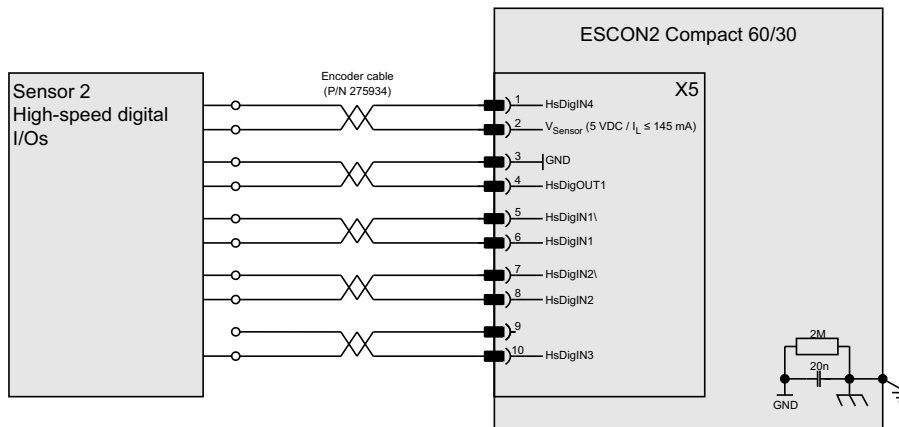


Figure 4-46 High-speed digital I/Os

This interface can handle a digital incremental encoder, an SSI / BiSS C digital unidirectional absolute encoder or high-speed digital I/O's. Only one out of these three functions can be used at the same time.

4.3.7 Digital I/Os

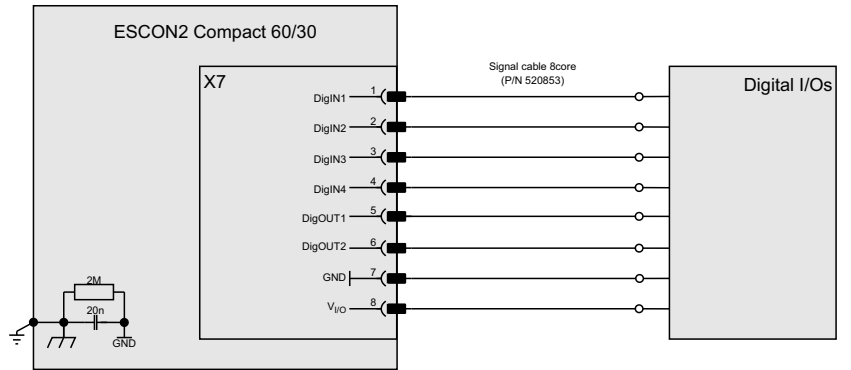


Figure 4-47 Digital I/Os

4.3.8 Analog I/Os

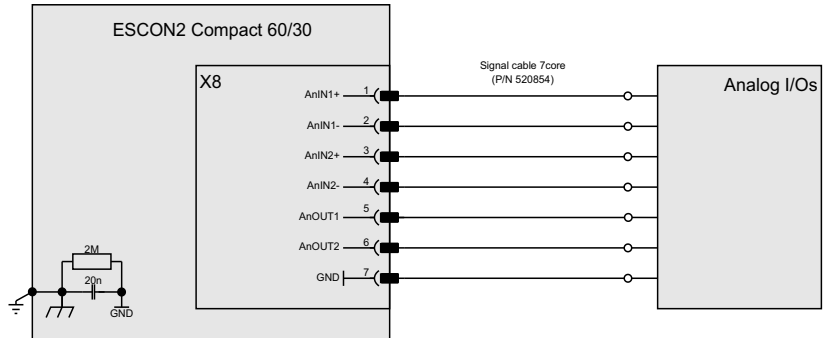


Figure 4-48 Analog I/Os

4.3.9 CAN

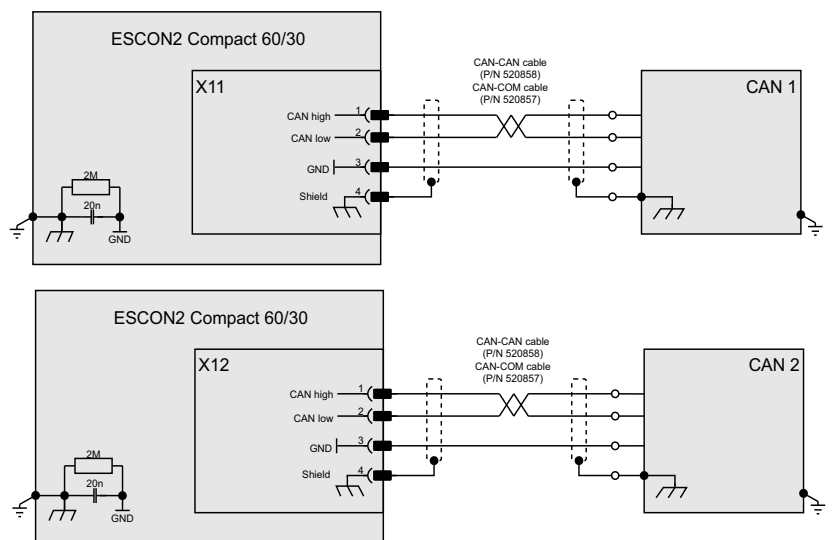


Figure 4-49 CAN

Depending on the preferred interface, one of the two prefab CAN cables can be used.

4.3.10 USB

4.3.10.1 USB-C

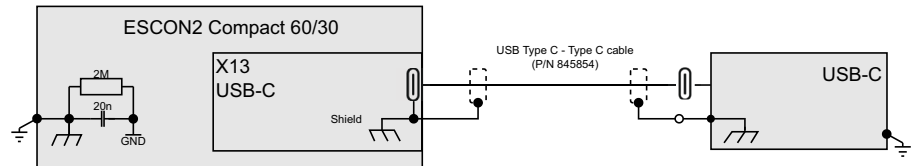


Figure 4-50 USB-C

4.3.10.2 USB-A

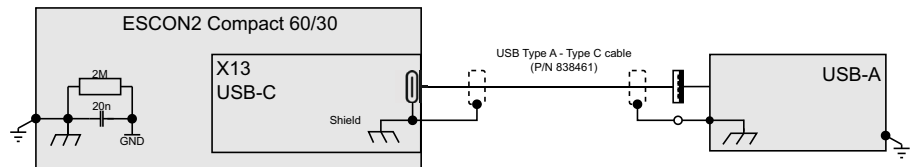


Figure 4-51 USB-A

4.3.11 Motor temperature sensor (future release)

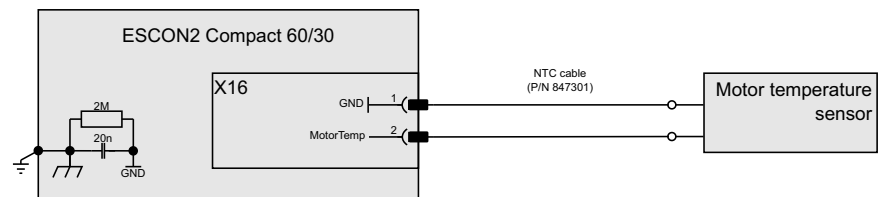


Figure 4-52 Motor temperature sensor

LIST OF FIGURES

Figure 1-1	Documentation structure	5
Figure 2-2	Derating of output current (operation without additional heatsink)	11
Figure 2-3	Extended operation @ VCC 60 VDC with additional heatsink	12
Figure 2-4	Power dissipation and efficiency	12
Figure 2-5	Dimensional drawing [mm]	13
Figure 2-6	Dimensional drawing – Attachment points [mm]	13
Figure 3-7	Connections	16
Figure 3-8	Power supply connector X1	18
Figure 3-9	Logic supply connector X2	20
Figure 3-10	Motor connector X3a	20
Figure 3-11	Motor connector X3b	21
Figure 3-12	Sensor 1 Hall sensor connector X4	22
Figure 3-13	Sensor 1 Hall sensor input circuit (analogously valid for Hall sensors 2 & 3)	24
Figure 3-14	Sensor 2 connector X5	24
Figure 3-15	Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)	26
Figure 3-16	Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)	27
Figure 3-17	SSI absolute encoder data input (analogously valid for BiSS C)	28
Figure 3-18	SSI absolute encoder clock output (analogously valid for BiSS C)	28
Figure 3-19	HsDigIN1 circuit “differential” (analogously valid for HsDigIN2)	29
Figure 3-20	HsDigIN1 circuit “single-ended” (analogously valid for HsDigIN2...3)	30
Figure 3-21	HsDigIN4 circuit “single-ended”	31
Figure 3-22	HsDigOUT1 circuit	31
Figure 3-23	Digital I/Os connector X7	31
Figure 3-24	DigIN1 circuit (analogously valid for DigIN2)	33
Figure 3-25	DigIN3 circuit (analogously valid for DigIN4)	33
Figure 3-26	DigOUT1 “sinks” (analogously valid for DigOUT2)	34
Figure 3-27	DigOUT1 “source” (analogously valid for DigOUT2)	35
Figure 3-28	Analog I/Os connector X8	35
Figure 3-29	AnIN1 circuit (analogously valid for AnIN2)	36
Figure 3-30	AnOUT1 circuit (analogously valid for AnOUT2)	37
Figure 3-31	CAN 1 connector X11/CAN 2 connector X12	37
Figure 3-32	USB connector X13	38
Figure 3-33	Motor temperature sensor connector X16	39
Figure 3-34	Motor temperature circuit	40
Figure 3-35	DIP switch SW1	41
Figure 3-36	LEDs – Location	44
Figure 4-37	Interfaces – Designations and location	45
Figure 4-38	Main wiring diagram	47
Figure 4-39	Power supply	48
Figure 4-40	Logic supply	48
Figure 4-41	DC motor	48

Figure 4-42	EC (BLDC) motor	49
Figure 4-43	Sensor 1 Hall sensor	49
Figure 4-44	Digital incremental encoder	49
Figure 4-45	SSI / BISS C unidirectional absolute encoder	50
Figure 4-46	High-speed digital I/Os	50
Figure 4-47	Digital I/Os	51
Figure 4-48	Analog I/Os	51
Figure 4-49	CAN	51
Figure 4-50	USB-C	52
Figure 4-51	USB-A	52
Figure 4-52	Motor temperature sensor	52

LIST OF TABLES

Table 1-1	Notations used in this document	6
Table 1-2	Symbols and signs	6
Table 1-3	Brand names and trademark owners	7
Table 2-4	Technical data	10
Table 2-5	Heatsink – tested components	12
Table 2-6	Limitations and protections	13
Table 2-7	Standards	14
Table 3-8	Prefab maxon cables.	17
Table 3-9	Motion connector set highest current – Content	17
Table 3-10	Recommended tools	18
Table 3-11	Power supply connector X1 – Pin assignment	18
Table 3-12	Power cable highest current	19
Table 3-13	Power supply requirements.	19
Table 3-14	Logic supply connector X2 – Pin assignment	20
Table 3-15	Power cable.	20
Table 3-16	Logic supply requirements	20
Table 3-17	Motor connector X3a – Pin assignment for maxon EC & DC motor	21
Table 3-18	Motor cable highest current.	21
Table 3-19	Motor connector X3b – Pin assignment for maxon EC & DC motor	22
Table 3-20	Motor cable high current	22
Table 3-21	Sensor 1 Hall sensor connector X4 – Pin assignment	23
Table 3-22	Sensor 1 Hall sensor cable	23
Table 3-23	Sensor 1 Hall sensor specification	23
Table 3-24	Sensor 2 connector X5 – Pin assignment.	25
Table 3-25	Encoder cable	25
Table 3-26	Differential digital incremental encoder specification	26
Table 3-27	Single-ended digital incremental encoder specification	26
Table 3-28	SSI / BISS C unidirectional absolute encoder specification	27
Table 3-29	Single-ended SSI / BISS C unidirectional absolute encoder data channel specification	27
Table 3-30	Single-ended SSI / BISS C unidirectional absolute encoder clock channel specification	28
Table 3-31	Encoder cable	29
Table 3-32	Differential high-speed digital input specification	29
Table 3-33	Single-ended high-speed digital input specification	30
Table 3-34	High-speed digital output specification	31
Table 3-35	Digital I/Os connector X7 – Pin assignment	32
Table 3-36	Signal cable 8core.	32
Table 3-37	Digital inputs 1...2 specification	32
Table 3-38	Digital inputs 3...4 specification	33
Table 3-39	Digital outputs specification – Sinks	34
Table 3-40	Digital outputs specification – Sources	34
Table 3-41	Analog I/Os connector X8 – Pin assignment.	35

Table 3-42	Signal cable 7core	35
Table 3-43	Analog input specification	36
Table 3-44	Analog output specification	36
Table 3-45	CAN 1 connector X11/CAN 2 connector X12 – Pin assignment	37
Table 3-46	CAN-CAN cable	37
Table 3-47	CAN-COM cable	38
Table 3-48	CAN interface specification	38
Table 3-49	USB Type C – Type C cable	39
Table 3-50	USB Type A – Type C cable	39
Table 3-51	USB interface specification	39
Table 3-52	Motor temperature sensor connector X16 – Pin assignment	40
Table 3-53	NTC cable	40
Table 3-54	Motor temperature sensor – specifications	40
Table 3-55	DIP switch SW1 – Binary code values	41
Table 3-56	DIP switch SW1 – Examples	42
Table 3-57	DIP switch SW1 – CAN automatic bit rate detection	43
Table 3-58	DIP switch SW1 – CAN bus termination	43
Table 3-59	Device status LEDs	44
Table 4-60	Possible combinations of feedback signals for DC motor	46
Table 4-61	Possible combinations of feedback signals for EC (BLDC) motor	46

INDEX

A

alerts 6
Analog inputs 36
Analog outputs 36
applicable EU directive 15
applicable regulations 8

B

bit rate detection 43
bit rate, default 38

C

cables (prefab)
CAN-CAN cable 37
CAN-COM cable 38
Encoder cable 25, 29
Hall sensor cable 23
Motor cable high current 22
Motor cable highest current 21
NTC cable 40
Power cable 20
Power cable highest current 19
Signal cable 7core 35
Signal cable 8core 32
USB Type A - Type C cable 39
USB Type C - Type C cable 39

CAN bus termination 38, 43

CAN ID 41

CAN interface 38

codes (used in this document) 6

connector

Motor temperature sensor 39

connectors

X1 18
X11 37
X12 37
X13 38
X16 39
X2 20
X3 20
X3a 20, 21
X3b 21, 22
X4 22
X5 24
X7 31
X8 35

country-specific regulations 8

D

device condition, display of 44
digital high-speed inputs (differential) 29
digital high-speed output 31
Digital incremental encoder (differential) 26
Digital incremental encoder (single-ended) 26
digital inputs 32, 33
digital outputs 34

DIP switch SW1 41

E

encoders
absolute 27
absolute (single-ended) 27
incremental 26

ESD 8

EU directive, applicable 15

H

Hall sensor 23

High-speed digital input (single-ended) 30

how to

calculate the required supply voltage 19
interpret icons (and signs) used in this document 6

I

ID (of the device) 41

incorporation into surrounding system 15

informatory signs 6

Inputs

High-speed digital 29

inputs

analog 36
digital 32, 33

interfaces

CAN 1 37
CAN 2 37
location and designation 45
USB 38, 39
USB type A 39
USB Type C 39

L

LED 44

M

mandatory action signs 6

Motion connector set highest current 17

Motor temperature sensor input 40

N

notations (used in this document) 6

O

operating license 15

outputs

analog 36
digital 34
High-speed digital output 31

P

part numbers

275829 20
275878 23

- 275934 25, 29
- 520851 22, 48, 49
- 520853 32
- 520854 35
- 520857 38
- 520858 37
- 783734 9
- 838459 19
- 838460 21, 48, 49
- 838461 39
- 845854 39
- 846645 17
- 847301 40

- performance data 9
- pin assignment 16
- precautions 8
- prerequisites prior installation 15
- prohibitive signs 6
- protective measures (ESD) 8
- purpose
 - of the device 7
 - of the document 5

R

- regulations, applicable 8

S

- safety alerts 6
- safety first! 8
- serial encoder 27
- signs used 6
- SSI / BiSS C unidirectional absolute encoder 27
- standards, fulfilled 14
- status LEDs 44
- supply voltage, required 19
- SW1 41
- symbols used 6

T

- technical data 9
- termination (CAN bus) 38, 43

U

- USB port 38

W

- wiring examples
 - analog incremental encoder 51
 - CAN-CAN / CAN-COM cable 51
 - DC & EC (BLDC) motor 48, 49
 - digital absolute encoder SSI / BiSS C 51
 - Digital incremental encoder (sensor 2) 50
 - Hall sensors (sensor 3) 49, 50
 - logic supply 48
 - power supply 48
 - sensor 2 encoder I/Os 49
 - SSI encoder 52
 - USB C 52
 - USB-A 52

••page intentionally left blank••

